


# nSIG - Acoustic-optical siren

A set used for acoustic and optical signaling. Made in environmental class III. For outdoor installation, wall mounting or plinth.

## Kit contents

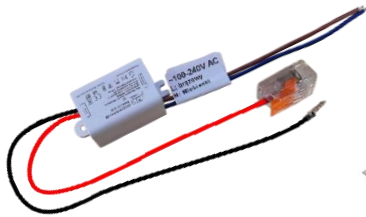


1. 12V Power Supply





2. Plinth bracket



3. Siren Acoustics+LED

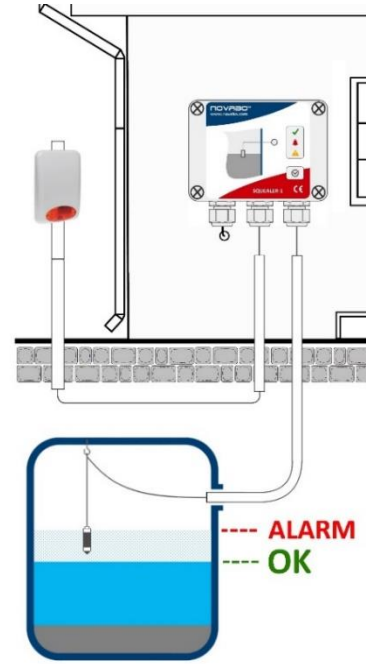

## Connection of the siren

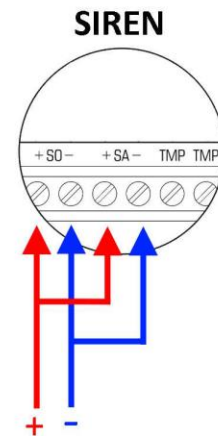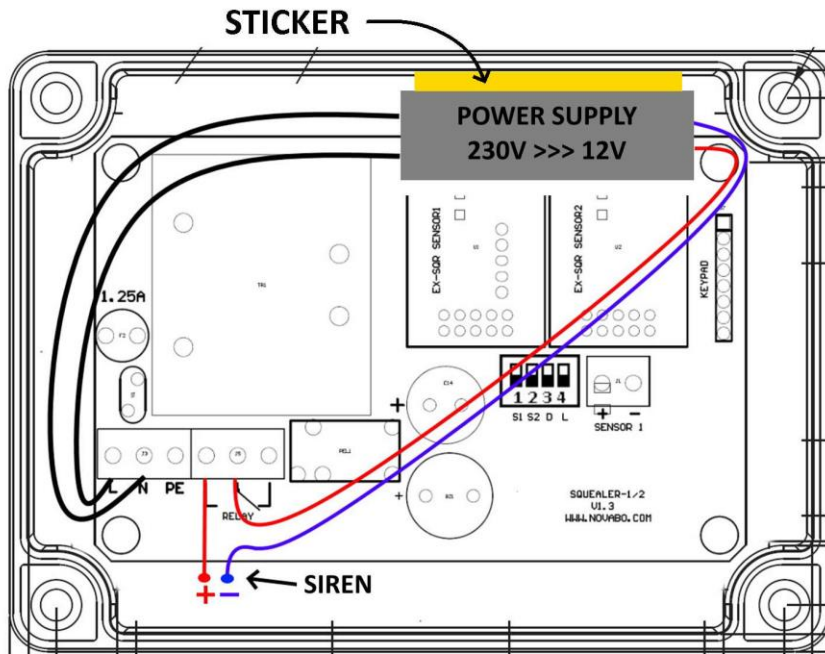

### Siren specification

Siren specification	Siren
Current consumption	520mA
Voltage	12V DC
Sound pressure	Up to 120dB
Working temperature	-35°C ÷ +55°C
Maximum humidity	93%
Environmental Class	III, Standard EN50130-5

### Power supply

Voltage In/Out	230VAC/12VDC
Working temperature	-35°C ÷ +55°C

**NOVABO**

phone: +48/58-746-37-73

[www.novabo.com](http://www.novabo.com) , [novabo@novabo.com](mailto:novabo@novabo.com)

**NOVABO™**  
measurement and automation

